


FLOOD LIGHT SERIES


IP66 LED FLOOD LIGHTS - PIR OPTION




10W

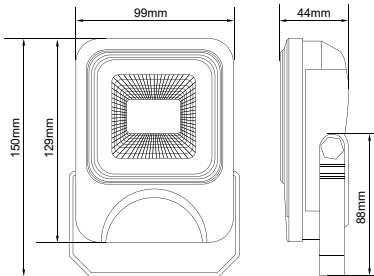


30W

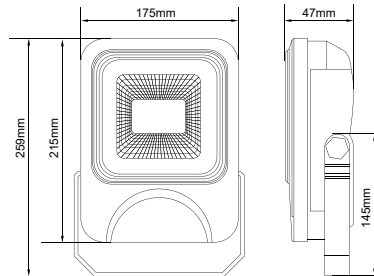


50W

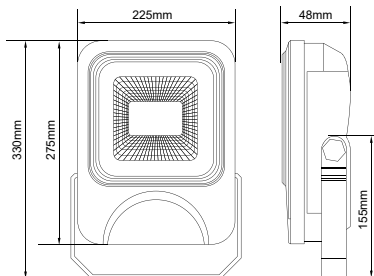

100W

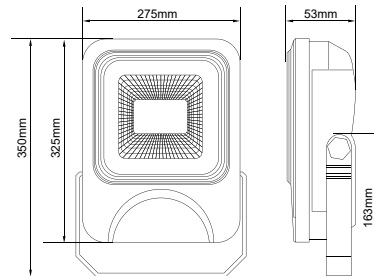

200W

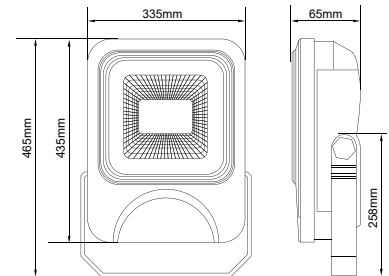

PRODUCT FEATURES

- ✓ High thermal efficient aluminium housing - superior heat dissipation
- ✓ Epistar 3030 Chips - Unique reflector with 5% improved reflectivity rate
- ✓ IP66 rated - double waterproof design - corrosion-resistant - durable
- ✓ The latest LED technology and design for performance & durability
- ✓ Energy savings & reduced maintenance
- ✓ Environmentally friendly: no mercury or hazardous substances



PRODUCT SPECIFICATION



| Code | Dimensions | Lumens | Power | Voltage | LED | CCT | CRI | Beam | IP | PIR Sensor | Dimmable |
|---------------|--------------|--------|-------|-----------|--------------|-------|-----|------|------|------------|----------|
| FL/10W/6K/NS | 129*99*44mm | 1100 | 10W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | x | No |
| FL/10W/6K/S | 129*99*44mm | 1100 | 10W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | ✓ | No |
| FL/30W/6K/NS | 215*175*47mm | 3300 | 30W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | x | No |
| FL/30W/6K/S | 215*175*47mm | 3300 | 30W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | ✓ | No |
| FL/50W/6K/NS | 275*225*48mm | 5500 | 50W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | x | No |
| FL/50W/6K/S | 275*225*48mm | 5500 | 50W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | ✓ | No |
| FL/100W/6K/NS | 325*275*53mm | 11000 | 100W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | x | No |
| FL/100W/6K/S | 325*275*53mm | 11000 | 100W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | ✓ | No |
| FL/200W/6K/NS | 435*335*65mm | 22000 | 200W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | x | No |
| FL/200W/6K/S | 435*335*65mm | 22000 | 200W | AC85-277V | Epistar 3030 | 6000K | >80 | 120° | IP66 | ✓ | No |